


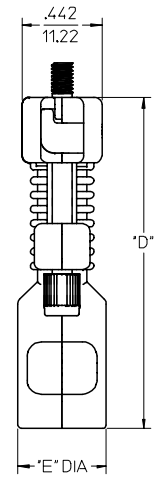


CKT SIZE	*A* DIM	*B* DIM	*C* DIM	*D* DIM	*E* DIM	CABLE OD
18	1.320/33.55	.691/17.56	.950/24.13	1.835/46.62	.490/12.45	.310/7.87
28	1.570/39.90	.941/23.91	1.200/30.48	1.835/46.62	.490/12.45	.335/8.51
38	1.820/46.25	1.191/30.26	1.450/36.83	2.270/57.65	.490/12.45	.355/9.02
48	2.070/52.60	1.441/36.61	1.700/43.18	2.478/62.93	.569/14.45	.440/11.18
72	2.670/67.84	2.041/51.85	2.300/58.42	2.741/69.62	.726/18.45	.635/16.13

NOTES:
 1. MATERIALS:
 BACKSHELL - ZINC ALLOY DIE CAST, FINISH DULL NICKEL PLATING.
 JACKSCREW - STAINLESS STEEL, FINISH PASSIVATE.
 MOUNTING SCREW - STEEL ALLOY, FINISH CLEAR ZINC PLATING.
 2. PLUG CABLE KIT COMPONENTS TO BE BULK PACKAGED PER PK-75115-991.
 3. MOUNTING SCREW APPLICATION TORQUE TO BE MIN. 3 lbf-in AND NOT TO EXCEED 4 lbf-in.
 5. STRAIN RELIEF IS DESIGNED FOR THE CABLE DIAMETER SPECIFIED IN TABLE ON THIS PAGE.
 WHEN USING SMALLER CABLE DIAMETER, USE HEAT SHRINK TUBING TO BUILD UP THE CABLE TO THE SPECIFIED DIAMETER.

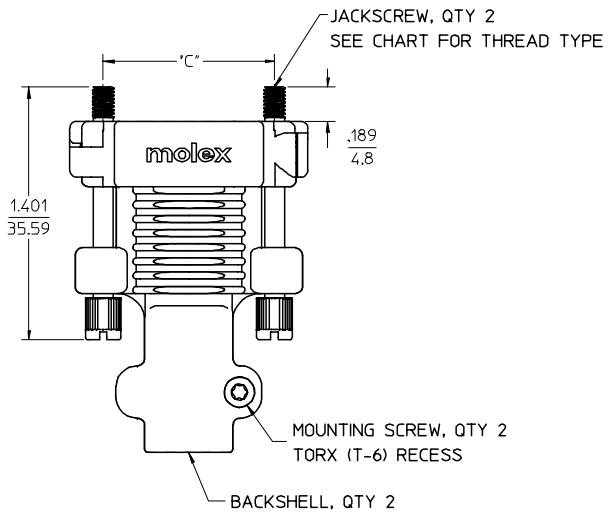

18 CKT PLUG CABLE KIT



MOD JACKSCREW MATERIAL EC NO: UCP2007-1309 DRWN:MSIBARRA2007/02/27 CHKD:DMORGAN2007/03/05 APPR:SMILLER 2007/03/06	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ◇=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY		
			m	INCH	DIMENSION STYLE IN/MM		TITLE SALES DRAWING TDP PLUG CABLE KIT DULL NICKEL FINISH			
			4 PLACES ± --- ± ---	3 PLACES ± --- ±.010	DRAWN BY TMCCLELL	DATE 02/11/06	MATERIAL NO. SEE CHART		DOCUMENT NO. SD-75115-002	SHEET NO. 1 OF 1
			2 PLACES ±0.25 ± ---	1 PLACE ± --- ± ---	CHECKED BY TMCCLELL	DATE 02/11/07	APPROVED BY BANAKIS		DATE 02/11/07	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							